


DRUM DÖNER  
SCREEN TAMBUR  
ELEK

It can be used to prevent entrance of minimum 0.25 mm thick particles to the treatment plant at the beginning of all treatment process. There are two kind of equipment as Internal Flow Drum Screen and External Flow Drum Screen. Equipment can be selected according to waste water quality. Both two unit are designed according to wastewater capacity and size of particles conductivity.

Tüm arıtma tesislerinin proses başlangıcında min. 0.25 mm kalınlığındaki parçacıkların tutularak tesise girişinin engellenmesi için kullanılabilir. Dıştan ve içten akışlı olarak iki farklı ekipman çeşidi bulunmaktadır. Atıksu niteliğine bağlı olarak model seçimi yapılabilir. Her bir ünite kapasite ve tane geçirgenlik büyüklüğüne bağlı olarak Coşkun Arıtma A.Ş. mühendisleri tarafından projelendirilir.



**Anti-Clog Screens**

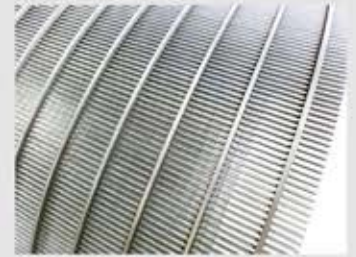

**AISI** 304  
or  
316

